


Table 1
Summary of First-Draw Drinking Water Sample Analytical Results
Guilford County Schools
Mclver Education Center
Greensboro, North Carolina
H&H Job No. GCS-001

Sample ID	Guilford County Sample Location Code	Sampling Date	Analytical Method	Lead	Copper
				ppb ⁽¹⁾	ppm ⁽²⁾
MEC-001-001-KF-P	001	2/29/2020	200.8	<2.0	0.049
MEC-001-002-KF-P	002	2/29/2020		<2.0	0.066
MEC-001-003-KF-P	003	2/29/2020		<2.0	0.043
MEC-001-004-KF-P	004	2/29/2020		<2.0	0.043
MEC-001-005-IM-P	005	2/29/2020		<2.0	<0.0020
MEC-001-006-BP-P	006	2/29/2020		5.2	0.14
MEC-001-007-WC-P	007	2/29/2020		<2.0	0.032
MEC-001-008-WC-P	008	2/29/2020		<2.0	0.15
MEC-002-009-WC-P	009	2/29/2020		<2.0	0.20
MEC-002-010-WC-P	010	2/29/2020		<2.0	0.072
MEC-001-011-WC-P	011	2/29/2020		<2.0	0.024
MEC-002-012-WC-P	012	2/29/2020		<2.0	0.69
MEC-002-013-WC-P	013	2/29/2020		6.9	0.10
District Threshold ⁽³⁾				10	1.3

Notes


- 1.) Lead results reported in parts per billion (ppb).
- 2.) Copper results reported in parts per million (ppm).
- 3.) Remediation threshold established by Guilford County Schools.

2 Maps 01-14-20

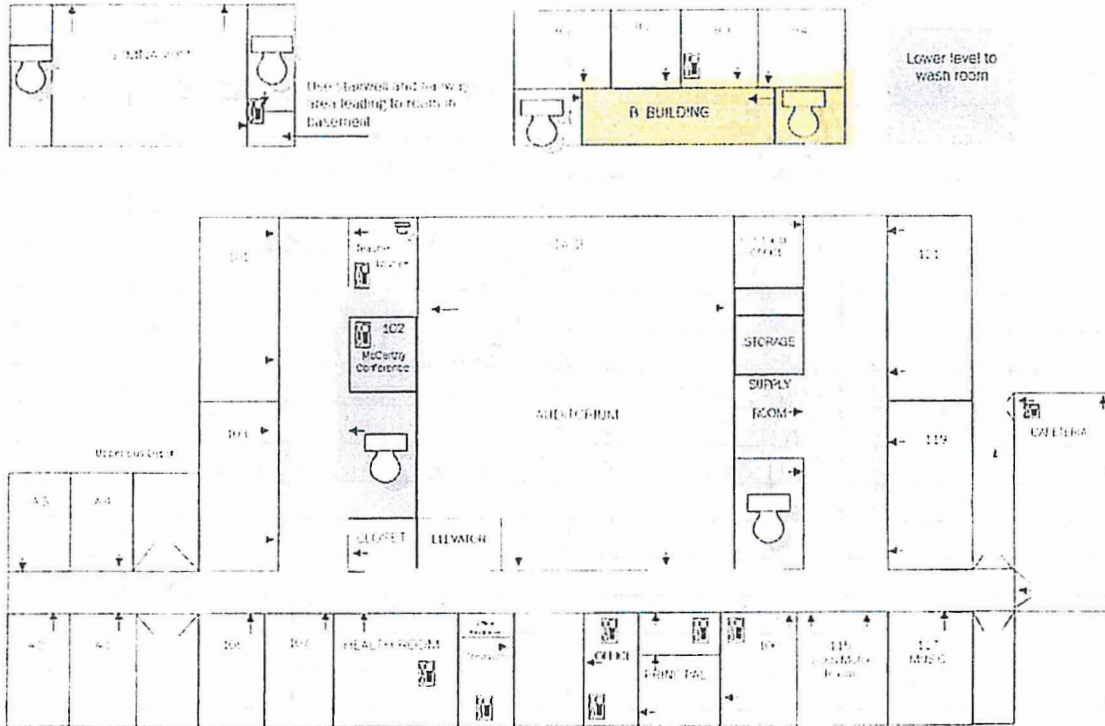

McIVER EDUCATION CENTER
FIRST FLOOR
TORNADO PLAN

REVISED 2012-2013

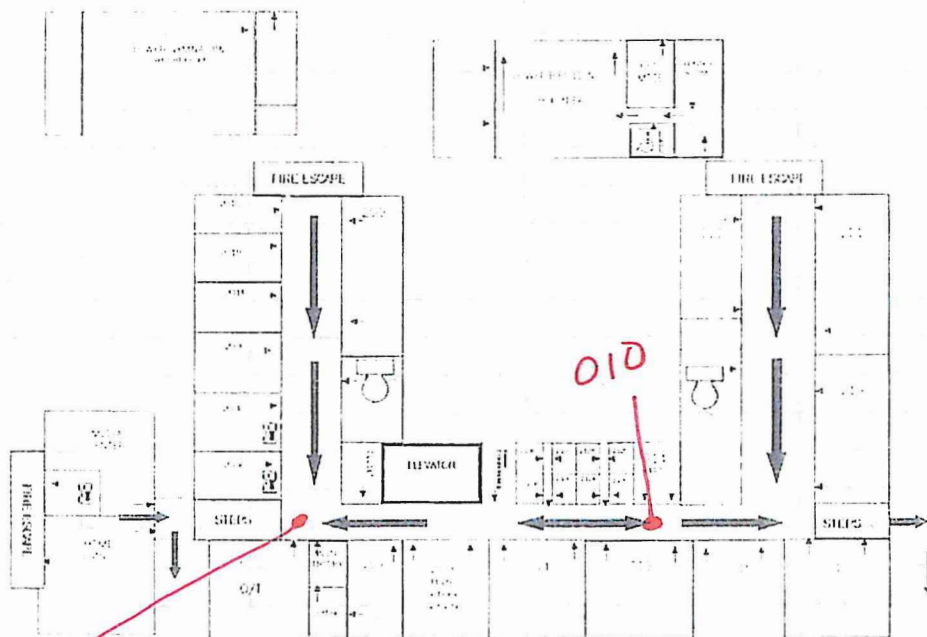


McIVER EDUCATION CENTER
SECOND FLOOR
TORNADO PLAN

REVISED 2012-2013

Office	100: Counselors Ms. Benton & Ms.Boozor
Main	101-Science-Patrick Raines
Room	102: Social Worker- Ms. Harris
Room	103 MS/HS EC- Mr.Meadows
Room	104-106 Boy's Bathroom
Room	105: MS/HS Lang Arts/HS English- Mrs. Brown
Room	107-Social Studies- Mr.Kyser
Room	108- Auditorium
Lounge	109-109.A Teachers Lounge -MailBoxes- Main Copier/Kitchenette
Girls Bathroom	110
Office	111--Principal's Office (TBD)
112	Status unknown
Office	113-Main Office-Mrs. Bryant


Other: Media Office Area-2nd Floor -Testing Coordinator/TA-Ms. McNeil

Angela Moore
01.14.20
McIVER 1st floor

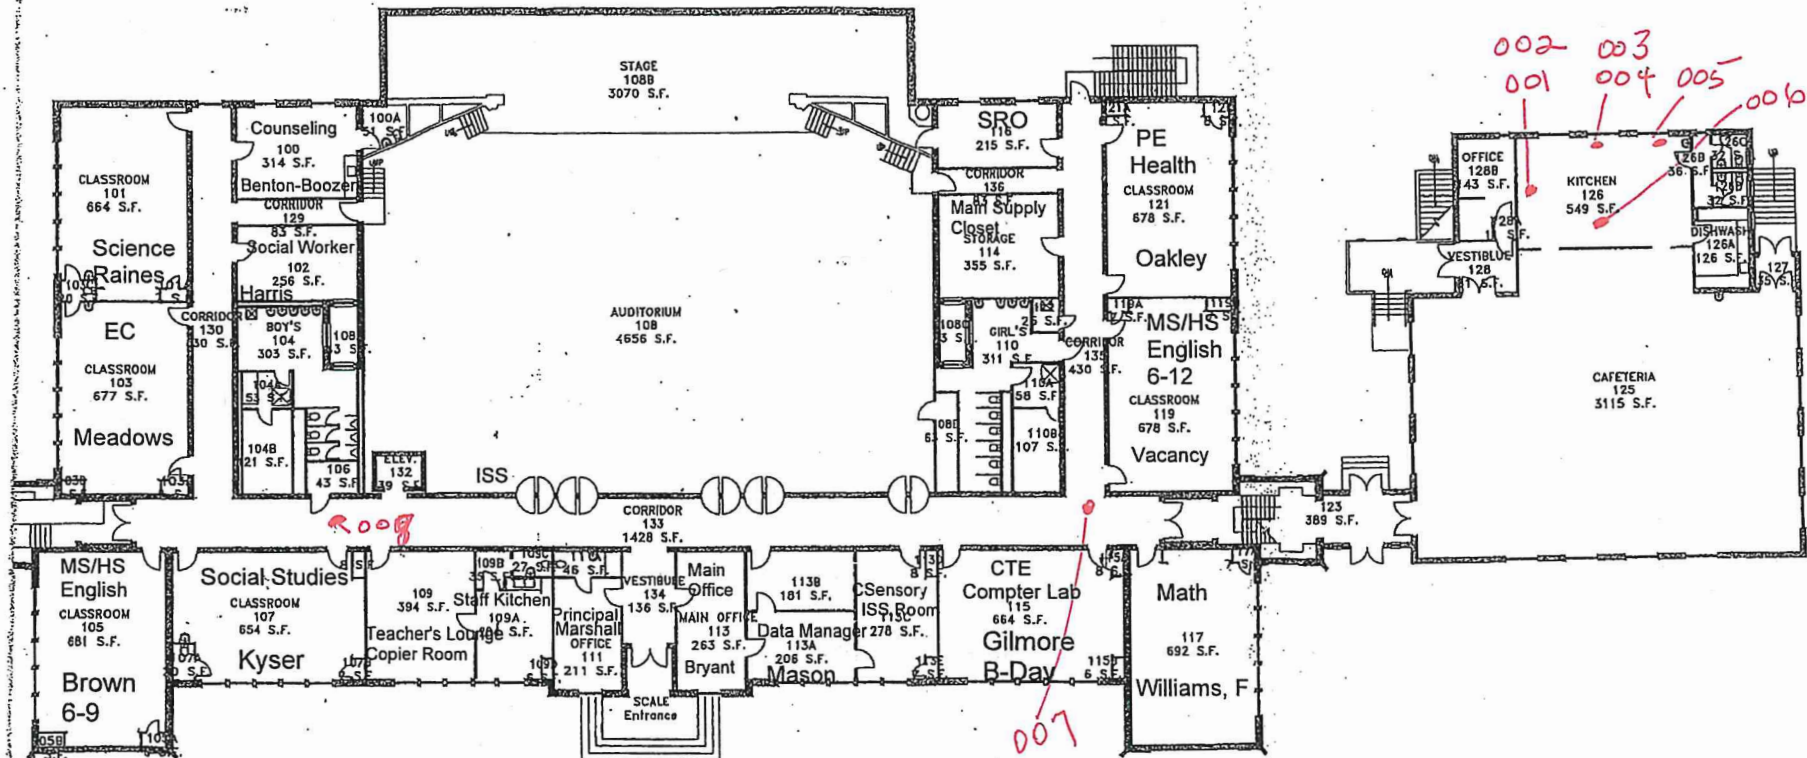

xx McIver Education Center xx


Fire Evacuation Plan

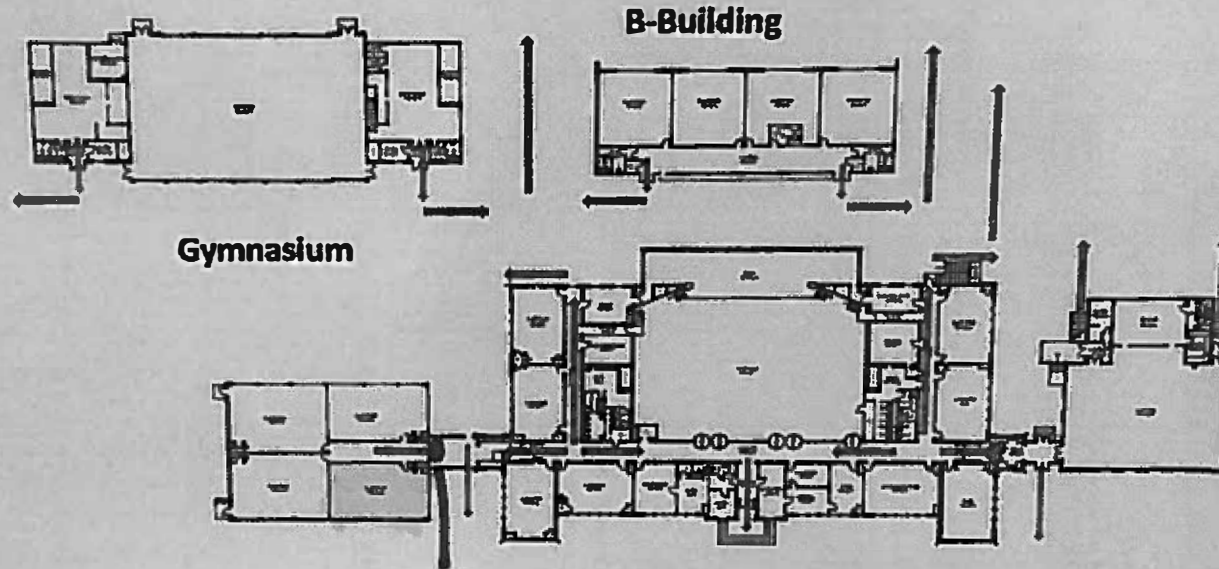

— Fire Evacuation

011

xxxxxxxxxxxxFirst Floorxxxxxxxxxxxx

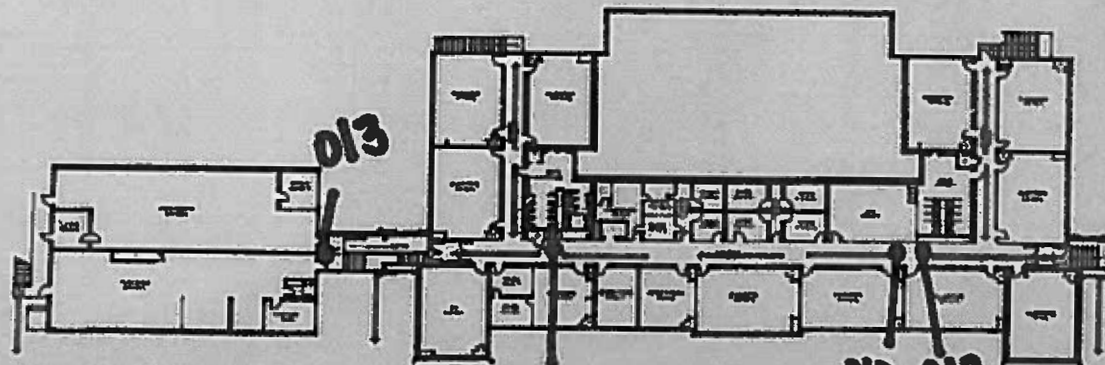

xxxxxxxxxxxxSecond Floorxxxxxxxxxxxx

SCHOOL: McIver EducationDATE 01-14-2

SAMPLE LOCATION CODE	ROOM	LOCATION	FIXTURE TYPE	BRAND	AGE	COUNT
001		Cafe	3 Dept. Sink L/H			
002		Cafe	3 Dept. Sink R/H			
003		Cafe	Prep. Sink L/H			
004		Cafe	Prep. Sink R/H			
005		Cafe	Ice Maker			
006		Cafe	Braising Pan			
007		Hall	Water Fountain			
008		Hall near 107	Water Fountain			
009		Hall Top of stairs	Water Fountain			
010		Hall near 215	Water Fountain			
011						
012						
Hart & Hickman notes based on field conditions identified during sampling: - Another water cooler was located adjacent to water cooler 010 and a sample (012) was collected. - A two floor building addition was not shown on GCS-provided maps. Water coolers were identified on the first and second floors and samples were collected (011 and 013).						
019						
020						
021						
022						
023						
024						
025						
026						
027						
028						
029						
030						
031						
032						
033						
034						
035						
036						
037						
038						
039						
040						
041						
042						
043						
044						

Hart & Hickman (Charlotte)
Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education Center

Lab Submittal Date: 03/03/2020

Work Order: 0030022

This data package contains the analytical results for the project identified above and includes a Case Narrative, Sample Results and Chain of Custody. Unless otherwise noted, all samples were received in acceptable condition and processed according to the referenced methods.

Data qualifiers are flagged individually on each sample. A key reference for the data qualifiers appears at the end of this case narrative.

Please call if you have any questions relating to this analytical report.

Respectfully,

WAYPOINT ANALYTICAL



Angela D. Overcash

Senior Project Manager

Data Qualifiers Key Reference:

BRL Below Reporting Limit

MDL Method Detection Limit

RPD Relative Percent Difference

* Results reported to the reporting limit. All other results are reported to the MDL with values between MDL and reporting limit indicated with a J.

Client Sample ID	Lab Sample ID	Matrix	Date/Time Sampled	Date/Time Received
MEC-001-001-KF-P	0030022-01	Drinking Water	02/29/20 7:43	03/03/20 15:55
MEC-001-002-KF-P	0030022-02	Drinking Water	02/29/20 7:44	03/03/20 15:55
MEC-001-003-KF-P	0030022-03	Drinking Water	02/29/20 7:48	03/03/20 15:55
MEC-001-004-KF-P	0030022-04	Drinking Water	02/29/20 7:49	03/03/20 15:55
MEC-001-005-IM-P	0030022-05	Drinking Water	02/29/20 7:38	03/03/20 15:55
MEC-001-006-BP-P	0030022-06	Drinking Water	02/29/20 7:45	03/03/20 15:55
MEC-001-007-WC-P	0030022-07	Drinking Water	02/29/20 7:30	03/03/20 15:55
MEC-001-008-WC-P	0030022-08	Drinking Water	02/29/20 7:28	03/03/20 15:55
MEC-002-009-WC-P	0030022-09	Drinking Water	02/29/20 8:01	03/03/20 15:55
MEC-002-010-WC-P	0030022-10	Drinking Water	02/29/20 7:58	03/03/20 15:55
MEC-001-011-WC-P	0030022-11	Drinking Water	02/29/20 7:25	03/03/20 15:55
MEC-002-012-WC-P	0030022-12	Drinking Water	02/29/20 7:59	03/03/20 15:55
MEC-002-013-WC-P	0030022-13	Drinking Water	02/29/20 8:07	03/03/20 15:55

Samples were received in good condition at 2.2 degrees C unless otherwise noted.

Waypoint ID	Client ID	Parameter	Method	Result	Units
0030022-01	MEC-001-001-KF-P	Copper	*200.8	0.049	mg/L
0030022-02	MEC-001-002-KF-P	Copper	*200.8	0.066	mg/L
0030022-03	MEC-001-003-KF-P	Copper	*200.8	0.043	mg/L
0030022-04	MEC-001-004-KF-P	Copper	*200.8	0.043	mg/L
0030022-06	MEC-001-006-BP-P	Copper	*200.8	0.14	mg/L
0030022-06	MEC-001-006-BP-P	Lead	*200.8	0.0052	mg/L
0030022-07	MEC-001-007-WC-P	Copper	*200.8	0.032	mg/L
0030022-08	MEC-001-008-WC-P	Copper	*200.8	0.15	mg/L
0030022-09	MEC-002-009-WC-P	Copper	*200.8	0.20	mg/L
0030022-10	MEC-002-010-WC-P	Copper	*200.8	0.072	mg/L
0030022-11	MEC-001-011-WC-P	Copper	*200.8	0.024	mg/L
0030022-12	MEC-002-012-WC-P	Copper	*200.8	0.69	mg/L
0030022-13	MEC-002-013-WC-P	Copper	*200.8	0.10	mg/L
0030022-13	MEC-002-013-WC-P	Lead	*200.8	0.0069	mg/L



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-001-KF-P

Sample ID: 0030022-01

Work Order: 0030022

Time Collected: 02/29/20 07:43

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.049	mg/L	0.0020	0.00094	1	*200.8	3/5/20 21:14	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 21:14	MMR	P0C0091

Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-002-KF-P

Sample ID: 0030022-02

Work Order: 0030022

Time Collected: 02/29/20 07:44

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.066	mg/L	0.0020	0.00094	1	*200.8	3/5/20 21:34	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 21:34	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-003-KF-P

Sample ID: 0030022-03

Work Order: 0030022

Time Collected: 02/29/20 07:48

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.043	mg/L	0.0020	0.00094	1	*200.8	3/5/20 21:41	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 21:41	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-004-KF-P

Sample ID: 0030022-04

Work Order: 0030022

Time Collected: 02/29/20 07:49

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.043	mg/L	0.0020	0.00094	1	*200.8	3/5/20 21:47	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 21:47	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-005-IM-P

Sample ID: 0030022-05

Work Order: 0030022

Time Collected: 02/29/20 07:38

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	BRL	mg/L	0.0020	0.00094	1	*200.8	3/5/20 21:54	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 21:54	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-006-BP-P

Sample ID: 0030022-06

Work Order: 0030022

Time Collected: 02/29/20 07:45

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.14	mg/L	0.0020	0.00094	1	*200.8	3/5/20 22:01	MMR	P0C0091
Lead	0.0052	mg/L	0.0020	0.00082	1	*200.8	3/5/20 22:01	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-007-WC-P

Sample ID: 0030022-07

Work Order: 0030022

Time Collected: 02/29/20 07:30

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.032	mg/L	0.0020	0.00094	1	*200.8	3/5/20 22:20	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 22:20	MMR	P0C0091

Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-008-WC-P

Sample ID: 0030022-08

Work Order: 0030022

Time Collected: 02/29/20 07:28

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.15	mg/L	0.0020	0.00094	1	*200.8	3/5/20 22:27	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 22:27	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-002-009-WC-P
Sample ID: 0030022-09
Work Order: 0030022
Time Collected: 02/29/20 08:01
Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.20	mg/L	0.0020	0.00094	1	*200.8	3/5/20 22:34	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 22:34	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-002-010-WC-P
Sample ID: 0030022-10
Work Order: 0030022
Time Collected: 02/29/20 07:58
Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.072	mg/L	0.0020	0.00094	1	*200.8	3/5/20 22:40	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 22:40	MMR	P0C0091

Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-001-011-WC-P

Sample ID: 0030022-11

Work Order: 0030022

Time Collected: 02/29/20 07:25

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.024	mg/L	0.0020	0.00094	1	*200.8	3/5/20 22:47	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 22:47	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-002-012-WC-P

Sample ID: 0030022-12

Work Order: 0030022

Time Collected: 02/29/20 07:59

Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.69	mg/L	0.0020	0.00094	1	*200.8	3/5/20 23:13	MMR	P0C0091
Lead	BRL	mg/L	0.0020	0.00082	1	*200.8	3/5/20 23:13	MMR	P0C0091



Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - McIver Education
Center

Sample Matrix: Drinking Water

Client Sample ID: MEC-002-013-WC-P
Sample ID: 0030022-13
Work Order: 0030022
Time Collected: 02/29/20 08:07
Time Submitted: 03/03/20 15:55

Parameter	Result	Units	Report Limit	MDL	Dilution Factor	Method	Analysis Date/Time	Analyst	Batch ID
Total Metals									
Copper	0.10	mg/L	0.0020	0.00094	1	*200.8	3/5/20 23:20	MMR	P0C0091
Lead	0.0069	mg/L	0.0020	0.00082	1	*200.8	3/5/20 23:20	MMR	P0C0091

Hart & Hickman (Charlotte)
Attn: Christine Schaefer
2923 South Tryon St. Ste 100
Charlotte, NC 28203

Project: GCS-001 - Mclver Education
Center

Work Order: 0030022
Time Submitted: 3/3/2020 3:55:00PM

Total Metals - Quality Control

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P0C0091 - 200.8										
Blank (P0C0091-BLK1)										
					Prepared: 03/04/20 Analyzed: 03/05/20					
Copper	BRL	0.0020	mg/L							
Lead	BRL	0.0020	mg/L							
LCS (P0C0091-BS1)										
					Prepared: 03/04/20 Analyzed: 03/05/20					
Copper	0.101	0.0020	mg/L	0.1000		101	85-115			
Lead	0.0969	0.0020	mg/L	0.1000		97	85-115			
Matrix Spike (P0C0091-MS1)										
					Source: 0030022-01 Prepared: 03/04/20 Analyzed: 03/05/20					
Copper	0.146	0.0020	mg/L	0.1000	0.0492	97	70-130			
Lead	0.0987	0.0020	mg/L	0.1000	BRL	99	70-130			
Matrix Spike (P0C0091-MS2)										
					Source: 0030022-11 Prepared: 03/04/20 Analyzed: 03/05/20					
Copper	0.127	0.0020	mg/L	0.1000	0.0241	103	70-130			
Lead	0.0942	0.0020	mg/L	0.1000	BRL	94	70-130			
Matrix Spike Dup (P0C0091-MSD1)										
					Source: 0030022-01 Prepared: 03/04/20 Analyzed: 03/05/20					
Copper	0.151	0.0020	mg/L	0.1000	0.0492	102	70-130	3	10	
Lead	0.0978	0.0020	mg/L	0.1000	BRL	98	70-130	0.9	10	

Sample Extraction Data

Prep Method: 200.8

Lab Number	Batch	Initial	Final	Date/Time
0030022-01	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-02	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-03	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-04	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-05	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-06	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-07	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-08	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-09	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-10	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-11	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-12	P0C0091	50 mL	50 mL	03/04/20 14:42
0030022-13	P0C0091	50 mL	50 mL	03/04/20 14:42



Full Service Analytical & Environmental Solutions

449 Springbrook Road • P.O. Box 240543 • Charlotte, NC 28224-0543
Phone: 704/529-6364 • Fax: 704/525-0409

Client Company Name: H&H

Report To/Contact Name: Christine Schaefer

Reporting Address: 2923 S Tryon St. #100
Charlotte, NC 28203

Phone: (704) 586-0007 Fax (Yes) (No) (No)

Email (s) (No) Email Address: cschaefer@hartthickman.com

EDD Type: ☒ PDF ☒ Excel ☐ Other

Site Location Name: Mclver Education Center

Site Location Physical Address: Greensboro, NC

CHAIN OF CUSTODY RECORD

PAGE 1 OF 2 QUOTE # TO ENSURE PROPER BILLING: _____

Project Name: GCS-001 Mclver Education Center

Short Hold Analysis: (Yes) (No) (No) UST Project: (Yes) (No) (No)

*Please ATTACH any project specific reporting (QC LEVEL I II III IV) provisions and/or QC Requirements

Invoice To: accountspayable@hartthickman.com

Address: _____

Purchase Order No./Billing Reference GCS-001

Requested Due Date 1 Day 2 Days 3 Days 4 Days 5 Days

"Working Days" 6-9 Days Standard 10 days

Samples received after 15:00 will be processed next business day.

Turnaround time is based on business days, excluding weekends and holidays.

(SEE REVERSE FOR TERMS & CONDITIONS REGARDING SERVICES
RENDERED BY PRISM LABORATORIES, INC. TO CLIENT)

LAB USE ONLY

	YES	NO	N/A
Samples INTACT upon arrival?	☒	☐	☐
Received ON WET ICE? Temp _____	☒	☐	☐
PROPER PRESERVATIVES indicated?	☒	☐	☐
Received WITHIN HOLDING TIMES?	☒	☐	☐
CUSTODY SEALS INTACT?	☐	☐	☒
VOLATILES rec'd W/OUT HEADSPACE?	☒	☐	☐
PROPER CONTAINERS used?	☒	☐	☐

TO BE FILLED IN BY CLIENT/SAMPLING PERSONNEL

Certification: NELAC _____ USACE _____ FL _____ NC ☒

SC _____ OTHER _____ N/A _____

Water Chlorinated: YES _____ NO ☒

Sample Iced Upon Collection: YES ☒ NO _____

CLIENT SAMPLE DESCRIPTION	DATE COLLECTED	TIME COLLECTED MILITARY HOURS	MATRIX (SOIL, WATER OR SLUDGE)	SAMPLE CONTAINER			PRESERVA- TIVES	ANALYSES REQUESTED								REMARKS	PRISM LAB ID NO.
				*TYPE SEE BELOW	NO.	SIZE		Pb	Cu								
MEC-001-001-KF-P	2/29/20	07:43	Water ☒	P ☒	1	125	HNO3	☒									01
MEC-001-002-KF-P	2/29/20	07:44	Water ☒	P ☒	1	125	HNO3	☒									02
MEC-001-003-KF-P	2/29/20	07:48	Water ☒	P ☒	1	125	HNO3	☒									03
MEC-001-004-KF-P	2/29/20	07:49	Water ☒	P ☒	1	125	HNO3	☒									04
MEC-001-005-IM-P	2/29/20	07:38	Water ☒	P ☒	1	125	HNO3	☒									05
MEC-001-006-BP-P	2/29/20	07:45	Water ☒	P ☒	1	125	HNO3	☒									06
MEC-001-007-WC-P	2/29/20	07:30	Water ☒	P ☒	1	125	HNO3	☒									07
MEC-001-008-WC-P	2/29/20	07:28	Water ☒	P ☒	1	125	HNO3	☒									08
MEC-002-009-WC-P	2/29/20	08:01	Water ☒	P ☒	1	125	HNO3	☒									09
MEC-002-010-WC-P	2/29/20	07:58	Water ☒	P ☒	1	125	HNO3	☒									10

Sampler's Signature [Signature] Sampled By (Print Name) Jayna Sananikone Affiliation H&H

PRESS DOWN FIRMLY - 3 COPIES

Upon relinquishing, this Chain of Custody is your authorization for Prism to proceed with the analyses as requested above. Any changes must be submitted in writing to the Prism Project Manager. There will be charges for any changes after analyses have been initialized.

Relinquished By: (Signature) [Signature]

Received By: (Signature) [Signature]

Date 03-02-20

Military/Hours 14:05

Additional Comments: At C.E.S.A.

Relinquished By: (Signature) [Signature]

Received By: (Signature) [Signature]

Date 03-02-20

Military/Hours 15:30

3-3-20/14:15

Relinquished By: (Signature) [Signature]

Received For Prism Laboratories By: [Signature]

Date 3-3-20

Military/Hours 15:55

Red. [Signature]

Method of Shipment: NOTE: ALL SAMPLE COOLERS SHOULD BE TAPED SHUT WITH CUSTODY SEALS FOR TRANSPORTATION TO THE LABORATORY. SAMPLES ARE NOT ACCEPTED AND VERIFIED AGAINST COC UNTIL RECEIVED AT THE LABORATORY.

Fed Ex _____ UPS _____ Hand-delivered _____ Prism Field Service _____ Other Courier

Log - n - roup No.

0030022

3-3-20/14:15

PRISM USE ONLY

Site Arrival Time:

Site Departure Time:

Field Tech Fee:

Mileage:

SEE REVERSE FOR
TERMS & CONDITIONS

ORIGINAL

*CONTAINER TYPE CODES: A = Amber C = Clear G = Glass P = Plastic; TL = Teflon-Lined Cap VOA = Volatile Organics Analysis (Zero Head Space)



Full Service Analytical & Environmental Solutions

449 Springbrook Road • P.O. Box 240543 • Charlotte, NC 28224-0543
Phone: 704/529-6364 • Fax: 704/525-0409

Client Company Name: H&H

Report To/Contact Name: Christine Schaefer

Reporting Address: 2923 S Tryon St. #100
Charlotte, NC 28203

Phone: (704) 586-0007

Fax (Yes) (No):

Email (Yes) (No) Email Address: cschaefer@harthickman.com

EDD Type: ☒ PDF ☒ Excel ☐ Other

Site Location Name: Mclver Education Center

Site Location Physical Address: Greensboro, NC

CHAIN OF CUSTODY RECORD

PAGE 2 OF 2 QUOTE # TO ENSURE PROPER BILLING:

Project Name: GCS-001 Mclver Education Center

Short Hold Analysis: (Yes) (No) (No) UST Project: (Yes) (No) (No)

*Please ATTACH any project specific reporting (QC LEVEL I II III IV) provisions and/or QC Requirements

Invoice To: accountspayable@harthickman.com

Address:

Purchase Order No./Billing Reference GCS-001

Requested Due Date 1 Day 2 Days 3 Days 4 Days 5 Days

"Working Days" 6-9 Days Standard 10 days

Samples received after 15:00 will be processed next business day.

Turnaround time is based on business days, excluding weekends and holidays.

(SEE REVERSE FOR TERMS & CONDITIONS REGARDING SERVICES RENDERED BY PRISM LABORATORIES, INC. TO CLIENT)

LAB USE ONLY

	YES	NO	N/A
Samples INTACT upon arrival?	☒	☐	☐
Received ON WET ICE? Temp _____	☒	☐	☐
PROPER PRESERVATIVES indicated?	☒	☐	☐
Received WITHIN HOLDING TIMES?	☒	☐	☐
CUSTODY SEALS INTACT?	☒	☐	☐
VOLATILES rec'd W/OUT HEADSPACE?	☒	☐	☐
PROPER CONTAINERS used?	☒	☐	☐

TO BE FILLED IN BY CLIENT/SAMPLING PERSONNEL

Certification: NELAC ☐ USACE ☐ FL ☐ NC ☒

SC ☐ OTHER ☐ N/A ☐

Water Chlorinated: YES ☐ NO ☒

Sample Iced Upon Collection: YES ☒ NO ☐

CLIENT SAMPLE DESCRIPTION	DATE COLLECTED	TIME COLLECTED MILITARY HOURS	MATRIX (SOIL, WATER OR SLUDGE)	SAMPLE CONTAINER			PRESERVA- TIVES	ANALYSES REQUESTED								REMARKS	PRISM LAB ID NO.
				*TYPE SEE BELOW	NO.	SIZE		Pb, Cu									
MEC-001-011-WC	2/29/20	07:25	Water ☒	P ☒	1	125	HNO3	☒									11
MEC-002-012-WC	2/29/20	07:59	Water ☒	P ☒	1	125	HNO3	☒									12
MEC-002-013-WC	2/29/20	08:07	Water ☒	P ☒	1	125	HNO3	☒									13
			Water ☒	P ☒	1	125	HNO3	☒									
			Water ☒	P ☒	1	125	HNO3	☒									
			Water ☒	P ☒	1	125	HNO3	☒									
			Water ☒	P ☒	1	125	HNO3	☒									
			Water ☒	P ☒	1	125	HNO3	☒									
			Water ☒	P ☒	1	125	HNO3	☒									
			Water ☒	P ☒	1	125	HNO3	☒									

Sampler's Signature Jayna Sananikone

Sampled By (Print Name) Jayna Sananikone

Affiliation H&H

PRESS DOWN FIRMLY - 3 COPIES

Upon relinquishing, this Chain of Custody is your authorization for Prism to proceed with the analyses as requested above. Any changes must be submitted in writing to the Prism Project Manager. There will be charges for any changes after analyses have been initialized.

Relinquished By: (Signature) [Signature]

Received By: (Signature) [Signature]

Date

Military/Hours

Additional Comments: Riq-C.E.S.A.

Relinquished By: (Signature) [Signature]

Received By: (Signature) [Signature]

Date

Military/Hours

Additional Comments: 3-3-20/14:15

Relinquished By: (Signature) [Signature]

Received For Prism Laboratories By: [Signature]

Date

Military/Hours

Additional Comments: 3-3-20/14:15

Method of Shipment: NOTE: ALL SAMPLE COOLERS SHOULD BE TAPED SHUT WITH CUSTODY SEALS FOR TRANSPORTATION TO THE LABORATORY. SAMPLES ARE NOT ACCEPTED AND VERIFIED AGAINST COC UNTIL RECEIVED AT THE LABORATORY.

Log-In Group No.

Fed Ex ☐ UPS ☒ Hand-delivered ☐ Prism Field Service ☐ Other Courier

0030022

NPDES: - NC - SC UST: - NC - SC GROUNDWATER: - NC - SC DRINKING WATER: - NC - SC SOLID WASTE: - NC - SC RCRA: - NC - SC CERCLA: - NC - SC LANDFILL: - NC - SC OTHER: - NC - SC

PRISM USE ONLY

Site Arrival Time:

Site Departure Time:

Field Tech Fee:

Mileage:

SEE REVERSE FOR
TERMS & CONDITIONS

*CONTAINER TYPE CODES: A = Amber C = Clear G = Glass P = Plastic; TL = Teflon-Lined Cap VOA = Volatile Organics Analysis (Zero Head Space)

ORIGINAL